



96K SERIES
 BI-PARTING SLIDING DOORS
 FIXED SIDELITES
 NARROW STILE
 WITH THRESHOLD


O-SX-SX-O

7350 West Wilson Ave.
 Harwood Heights, IL 60706-4786

Phone: (800) 543-4635
 Fax: (708) 867-0291

www.doromatic.com

89502REV/C
 JUNE 18, 2003 ECN 00966

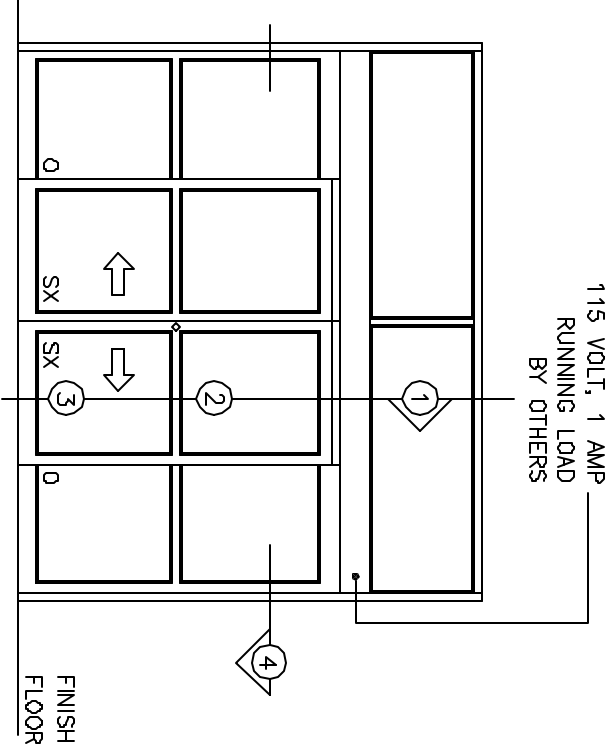

NOTE:

STANDARD PACKAGE:
 OPERATOR, NARROW STILE DOORS & SIDELITES, FRAMES
 2" MUNTINS, WEATHERSTRIPPING, EMERGENCY BREAKOUT
 ON "SX" DOORS, STANDARD LOCK CYLINDER WITH THUMBTURN
 4-POSITION SWITCH, 2-POSITION KEYSWITCH, MOTION SENSOR,
 PRESENCE SENSOR, DOOR HOLDING BEAMS, ANTI-JAR WHEELS,
 1/4" GLAZING SYSTEM, AND ONE PIECE 1/2" X 7-1/2"
 THRESHOLD - JAMB TO JAMB.

STANDARD FINISH:
 CLEAR ANODIZED - US28
 DARK BRONZE ANODIZED - DC13
 SPECIAL COLORS ARE AVAILABLE.

* MAX. GLASS THICKNESS IS 1"
 (GLASS STOP HEIGHT = 1-1/8").

* TRANSON OPTIONAL MAX. HEIGHT 6'-0" TOP
 OF HEADER TO TOP OF TRANSON. CONSULT
 FACTORY FOR LARGER SIZES.

* TRANSON FLUSH GLAZING OTHER THAN 1/4" GLASS
 HAS SURFACE APPLIED GLASS STOPS.

* ALL WRITTEN DIMENSIONS ARE TO TAKE
 PREFERENCE OVER SCALED DIMENSIONS.

* SIZES LARGER THAN 14'-0" - CONSULT WITH FACTORY.

* ALL ANSI DECALS ARE PROVIDED.

OVERALL FRAME WIDTH (A)	DOOR OPENING (B)	DOOR/PANEL WIDTH (C)	MASONRY OPENING WIDTH (D)
8'-3 1/2" (MIN.)	42"	25"	8'-4"
10'-0"	48"	30"	10'-0 1/2"
12'-0"	60"	36"	12'-0 1/2"
14'-0" (MAX.)	72"	42"	14'-0 1/2"

