



96K SERIES
SINGLE SLIDING DOOR
FULL BREAKOUT
NARROW STILE
WITH THRESHOLD


SO-SX AND SX-SO

7350 West Wilson Ave.
Harwood Heights, IL 60706-4786

Phone: (800) 543-4635
Fax: (708) 867-0291

www.doromatic.com

89503REV/B
OCTOBER 16, 2002 ECN 00921

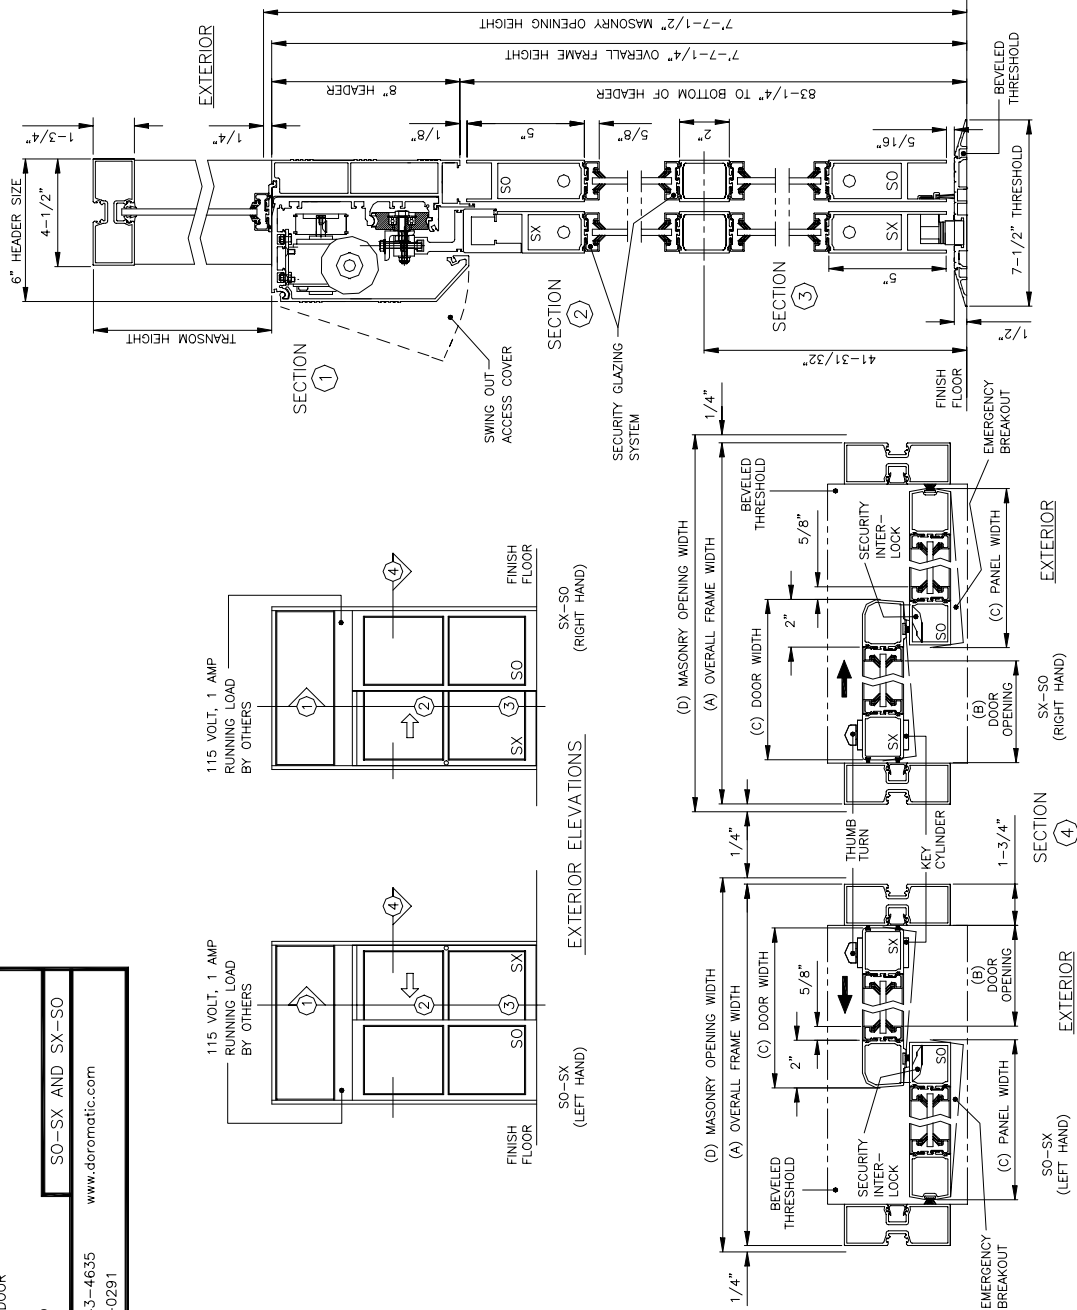

NOTE:
STANDARD PACKAGE:
OPERATOR, NARROW STILE DOORS & SIDELITE, FRAMES,
2" MUNTINS, WEATHERSTRIPPING, EMERGENCY BREAKOUT
ON "SX" DOOR & "SO" PANEL, STANDARD LOCK CYLINDER
WITH THUMBTURN, 4-POSITION SWITCH, 2-POSITION KEYSWITCH,
MOTION SENSOR, PRESENCE SENSOR, DOOR HOLDING BEAMS,
ANTI-LAR WHEELS, 1/4" GLAZING SYSTEM, AND ONE PIECE
1/2" X 7-1/2" THRESHOLD - JAMB TO JAMB.

STANDARD FINISH:
CLEAR ANODIZED - US28
DARK BRONZE ANODIZED - DC13
SPECIAL COLORS ARE AVAILABLE.

- * MAX. GLASS THICKNESS IS 5/8" ON "SX" SIDELITE AND 1" ON "SO" DOOR (GLASS STOP HEIGHT = 1-1/8").
- * TRANSOM OPTIONAL MAX. HEIGHT 6'-0" TOP OF HEADER TO TOP OF TRANSOM. CONSULT FACTORY FOR LARGER SIZES.
- * TRANSOM FLUSH GLAZING OTHER THAN 1/4" GLASS HAS SURFACE APPLIED GLASS STOPS.
- * ALL WRITTEN DIMENSIONS ARE TO TAKE PREFERENCE OVER SCALED DIMENSIONS.
- * SIZES NOT LISTED BELOW - CONSULT WITH FACTORY.
- * ALL ANISI DECALS ARE PROVIDED.

OVERALL FRAME WIDTH (A)	DOOR OPENING (B)	DOOR/PANEL WIDTH (C)	MASONRY OPENING WIDTH (D)
7'-0" (MIN.)	36"	41-1/8"	7'-0 1/2"
8'-0"	42"	47-1/8"	8'-0 1/2"
8'-6"	44"	50-1/8"	8'-6 1/2"
9'-0" (MAX.)	48"	53-1/8"	9'-0 1/2"